

CONDOR 500 S

Automation for swing gates
24 Vdc and 230 Vac

Life
made
easy




CONDOR 500 S

Technical features




DIMENSIONS (mm)

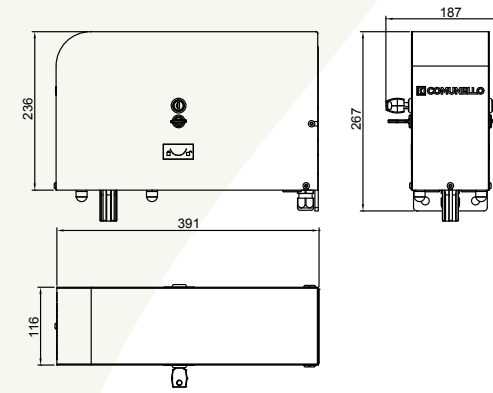

Technical features

	CONDOR 500 S 24V	CONDOR 500 S 230V
Voltage	24 VDC	230 VAC 50 Hz
Power consumption	150 W	280 W
Max. absorption	6,5 A	1,2 A
Max. thrust	330 Nm	440 Nm
Duty cycle	Intensive use	40%
Protection degree (IP)	IP44	IP44
Insulation class	1(earthing)	1(earthing)
Working temperature	-20°C / +50°C	-20°C / +50°C
No-load speed	0,15 rad/sec	0,1 rad/sec
Weight	12 kg	15,7 kg

OPERATING LIMITS CONDOR 500 S

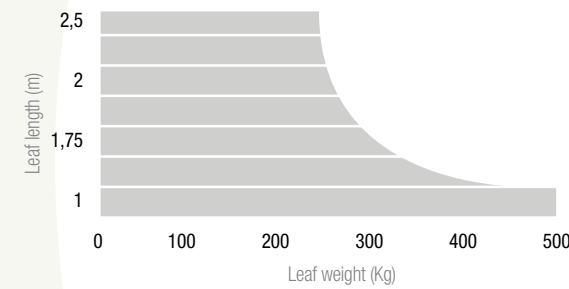


CONDOR 500 S
up to 2,5 m


24V 230V

AC-102-103-104


Ambidextrous arms in painted steel with locking system



L = 385mm + 330mm




L = 503mm + 430mm



L = 238mm + 620mm

Easily accessible onboard control unit with integrated receiver

Fixing bracket in painted steel

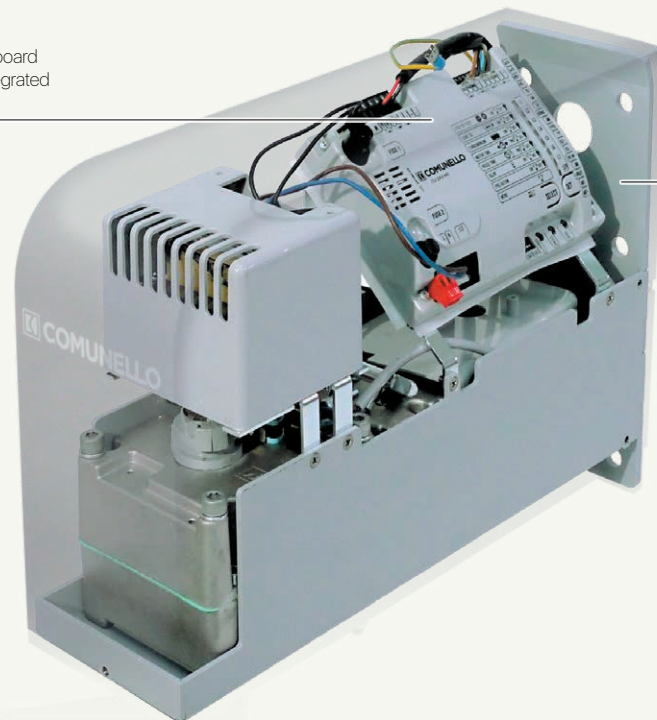

Every single product is duly tested at the end of each assembly line

OFFICIAL DEALER:



AUTOMATION FOR GATES, DOORS AND BARRIERS

FRATELLI COMUNELLO S.P.A.

HEADQUARTERS

Via Zarpellon, 33

36027 San Giuseppe di Cassola, Vicenza, Italy

Tel. +39 0424 585111 Fax +39 0424 533417

info@comunello.it www.comunello.com

REGISTERED OFFICE

Via Cassola,64 - C.P.79

36027 Rosà, Vicenza, Italy

Tel. +39 0424 585111 Fax +39 0424 533417

info@comunello.it www.comunello.com